

MSL-364B	MSL-364NUYL
MSL-364UB	MSL-364UG
MSL-364TG	MSL-364UYL
MSL-364UTG	MSL-3664SO
MSL-364PG	MSL-364UOL
MSL-364G	MSL-364DR

## Technical Data

# AxiaLEDs

## Features

- **Package** : Subminiature flat top package, Gull Wing
- **Viewing angle** : 125°
- **Technology** : AlGaAs (red)
  - AllInGaP (red, orange, amber, green)
  - GaP (pure green)
  - InGaN (true green, blue)
- **Wavelength** : 640 nm (red)
  - 625 nm (red), 605 nm (orange), 590 nm (amber), 573nm (green),
  - 555 nm (pure green),
  - 525 nm (true green), 470 nm (blue)
- **Grouping parameter** : luminous intensity , wavelength
- **Assembly methods** : suitable for all SMT assembly methods
- **Soldering methods** : IR reflow soldering and TTW soldering
- **Preconditioning** : acc. to JEDEC Level 2
- **Taping** : 12-mm tape with 1500/reel,  $\phi$ 180mm




## Applications

- **Automotive** : Dashboards
- **Backlighting** : LCDs , Key pads , advertising
- **Lighting** : Signal & symbol luminare , marker lights
- **Displays** : Message boards
- **Status indicators** : Consumer & industrial electronics

## Package Dimensions


Unit : mm (inch)

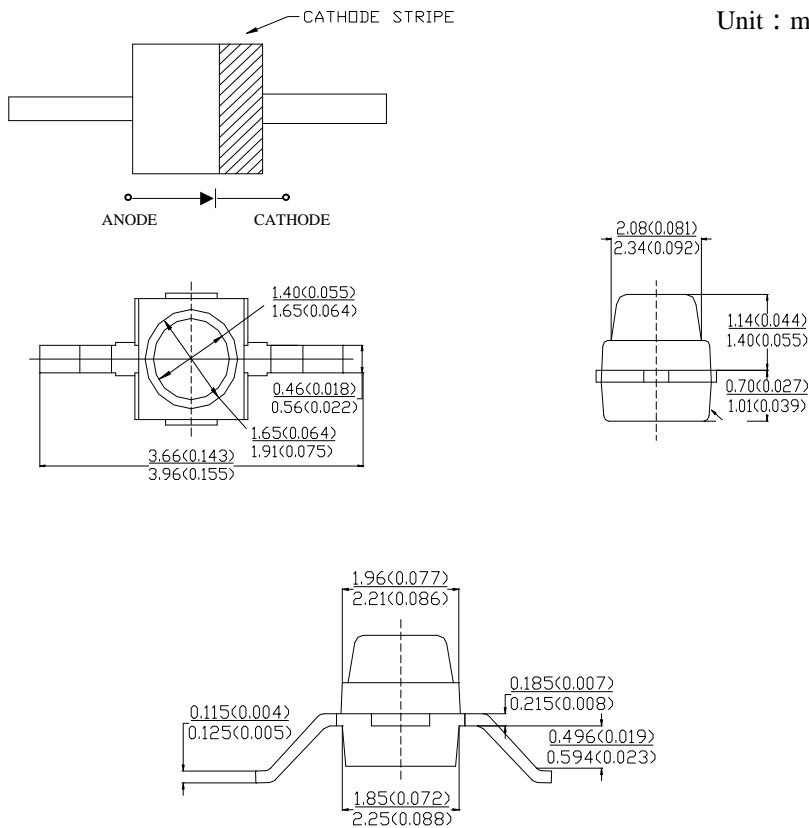


Notes :

1. All dimensions are in millimeters (inches)

## Package Dimensions



## Method of Taping / Polarity and Orientation Packing unit 1500/reel

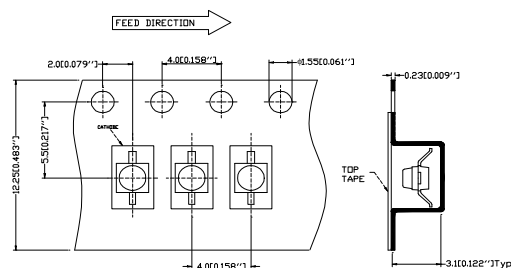

## Selection Guide

Part Number	Color of Emission	d (nm)	Package Description	Viewing Angle 2q 1/2	Luminous Intensity I <sub>v</sub> (mcd) @20mA
MSL-364B	Blue	470	Flat Top. Nondiffused	125°	60
MSL-364UB	Blue	470			120
MSL-364TG	Ture Green	525			200
MSL-364UTG	Ture Green	525			400
MSL-364PG	Pure Green	557			5
MSL-364G	Green	570			10
MSL-364UG	Green	572			120
MSL-364NUYL	Amber	587			60
MSL-364UYL	Amber	590			150
MSL-364SO	Orange	605			210
MSL-364UOL	Red	625			210
MSL-364DR	Red	640			40

## Maximum Ratings

Parameter	Symbol	Value					Unit
		UOL,SO	B,UB	DR	NUYL	G,PG	
		UYL,UG	TG,UTG				
Operating Temp. range	$T_{OP}$	-40 ~ +100		-20 ~ +100			°C
Storage Temp. range	$T_{stg}$	-55 ~ +100					°C
Junction temperature	$T_j$	110					°C
Forward current	$I_F$	50	30			mA	
Surge current $t \leq 10\mu s, D=0.005$	$I_{FM}$	0.5					A
Reverse Voltage ( $I_R=100\mu A$ )	$V_R$	5					V
Power dissipation	$P_{tot}$	105	55	65	70		mW
Lead Soldering Temperature [ 1.6 mm ( 0.063 in.) from body ]		260°C for 5 seconds					
SMT Reflow Soldering Temperatures Convective Reflow Vapor Phase Reflow		235°C Peak, above 183°C for 90 seconds 215°C for 3 minutes					

**Optical Characteristics at  $T_A=25^{\circ}\text{C}$**

Part Number	Luminous Intensity $I_V$ (mcd) @ 20mA		Peak Wavelength l peak (nm)	Color, Dominant Wavelength l d (nm)	Viewing Angle 2q 1/2 (Degrees)	Luminous Efficiency @ $I_F=20\text{mA}$ (lm / W)	Spectral Bandwidth at 50% Irel max (nm)
	Min.	Typ.	Typ.	Typ.	Typ.		
MSL-364B	25	60	468	470	125	80	26
MSL-364UB	40	120	468	470	125	80	26
MSL-364TG	63	200	523	525	125	465	36
MSL-364UTG	160	400	518	525	125	465	35
MSL-364PG	1.6	5	555	557	125	630	20
MSL-364G	4	10	568	570	125	576	30
MSL-364UG	40	120	576	572	125	560	16
MSL364NUYL	25	60	589	587	125	503	20
MSL364UYL	63	150	592	590	125	490	16
MSL-364SO	63	210	611	605	125	335	20
MSL-364UOL	63	210	633	625	125	190	20
MSL-364DR	16	40	660	640	125	60	20

**Electrical Characteristics at  $T_A=25^\circ\text{C}$**

Device Type	Forward Voltage $V_F$ (Volts) @ $I_F = 20\text{mA}$			Reverse Current $I_R$ (uA) @ $V_R = 5\text{V}$		Capacitance C (pF) $V_F=0$ , $f=1\text{MHz}$	Thermal Resistance $R_{qPIN}$ ( $^\circ\text{C/W}$ )
	Min.	Typ.	Max	Min.	Typ.	Typ.	Typ.
MSL-364B	-	3.30	4.0	0.01	10	70	110
MSL-364UB	-	3.70	4.2	0.01	10	70	110
MSL-364TG	-	3.30	4.0	0.01	10	70	110
MSL-364UTG	-	3.70	4.2	0.01	10	70	110
MSL-364PG	-	2.25	2.5	0.01	10	70	170
MSL-364G	-	2.30	2.6	0.01	10	70	170
MSL-364UG	-	2.00	2.5	0.01	10	70	170
MSL-364NUYL	-	2.10	2.4	0.01	10	70	170
MSL-364UYL	-	2.00	2.5	0.01	10	70	170
MSL-364SO	-	2.00	2.5	0.01	10	70	170
MSL-364UOL	-	2.00	2.5	0.01	10	70	170
MSL-364DR	-	1.80	2.4	0.01	10	70	170

**FIG.1 Relative spektrale Emission  $I_{rel} = f(\lambda)$ ,  $T_A = 25^\circ\text{C}$ ,  $I_F = 10\text{mA}$**

$V(\lambda)$  = Standard eye response curve

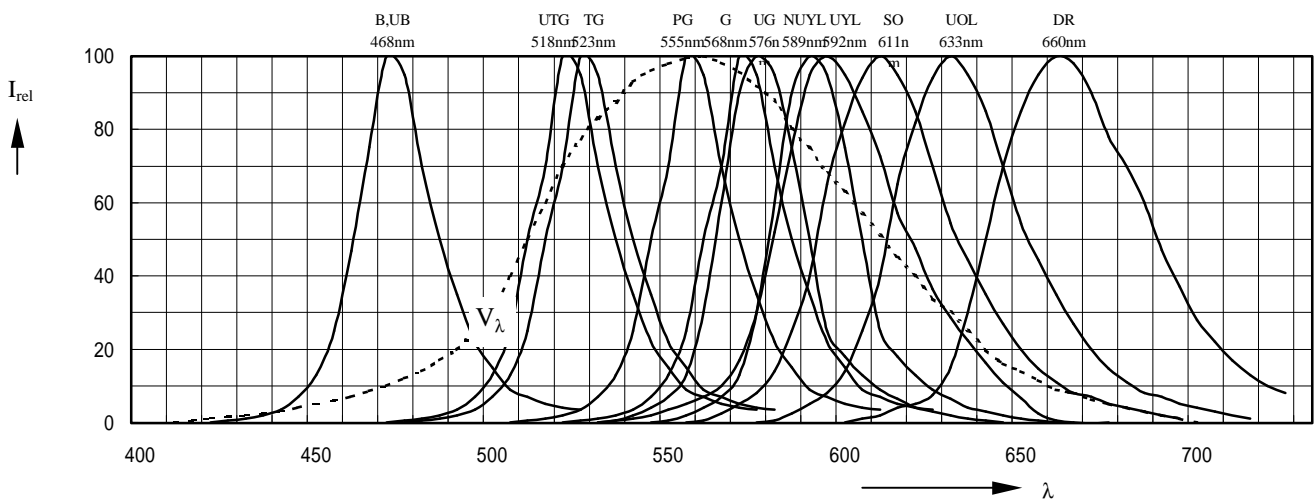


FIG.2 Forward Current  $I_F = f(V_F)$

$T_A = 25^\circ\text{C}$

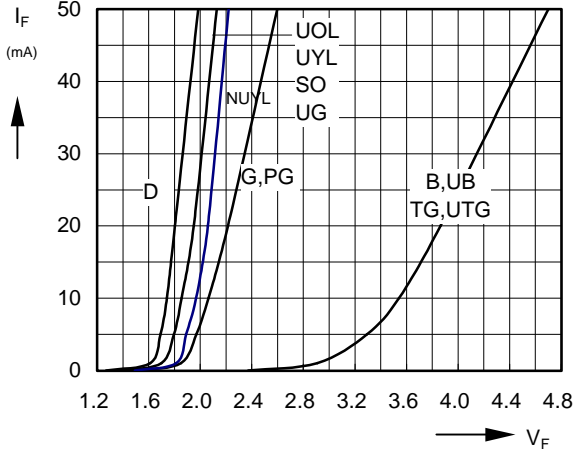


FIG.3 Relative Luminous Intensity  $I_V/I_V(10\text{mA}) = f(I_F)$

$T_A = 25^\circ\text{C}$

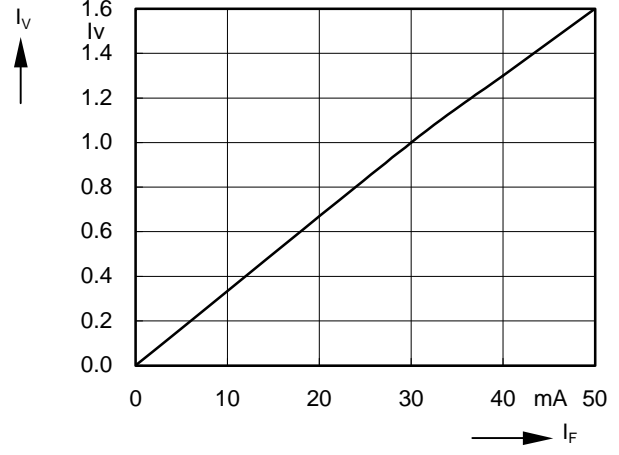


FIG.4 Relative Luminous Intensity  $I_{v(\text{rel})} = f(T_A)$

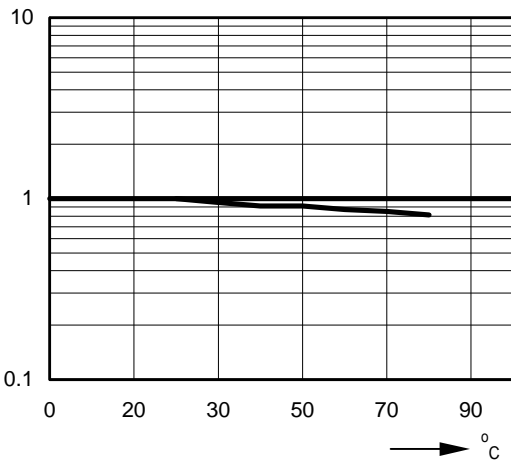


FIG.5 Radiation Characteristic  $I_{\text{rel}} = f(\theta)$


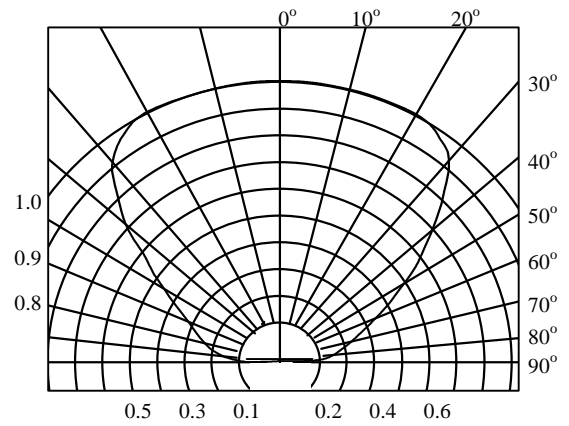


FIG.6 Max. Permissible Forward Current  $I_F = f(T_A)$

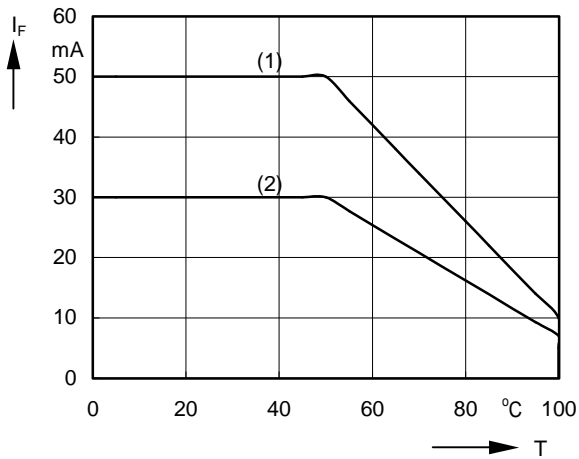

(1)	(2)
UG	B
UYL	UB
SO	TG
UOL	UTG
	PG
	G
	NUYL
	DR

**Part Numbering System**

M S L - 3 X X U Y L

**Chip Type  $\lambda$ d**

- 1:B 470nm
- 2:UB 470nm
- 3:TG 525nm
- 4:UTG 525nm
- 5:PG 557nm
- 6:G 570nm
- 7:UG 572nm
- 8:NUYL 587nm
- 9:UYL 590nm
- 10:SO 605nm
- 11:UOL 625nm
- 12:DR 640nm

**Epoxy Color & Package**

- 1:Color Diffused Epoxy
- 2:White Diffused Epoxy
- 3:Color Transparent Epoxy
- 4:Water Clear Epoxy

**Package Type & Lead Frame Forming Option**

- 0:Dome Straight Lead
- 1:Dome Yoke Lead
- 2:Dome Gull Wing Lead
- 3:Dome Z Bend Lead
- 4:Flat Top Straight Lead
- 5:Flat Top Yoke Lead
- 6:Flat Top Gull Wing Lead
- 7:Flat Top Z Bend Lead

**3:Subminiature Axial**

**L:Visible Lamp**

**S:Surface Mount Device**

**M:Company Code**

**Intensity Bin Limits**

Bin	Min.	Max.
A	0.10	0.20
B	0.16	0.32
C	0.25	0.50
D	0.40	0.80
E	0.63	1.25
F	1.00	2.00
G	1.60	3.20
H	2.50	5.00
J	4.00	8.00
K	6.30	12.50
L	10.00	20.00
M	16.00	32.00
N	25.00	50.00
P	40.00	80.00
Q	63.00	125.00
R	100.00	200.00
S	160.00	320.00
T	250.00	500.00
U	400.00	800.00
V	630.00	1250.00
W	1000.00	2000.00
X	1600.00	3200.00
Y	2500.00	5000.00

**Color Bin Limits**

Package	Bin	Min.	Max.
Pure Green	0	Full Distribution	
	9	552	556
	8	555	559
	7	558	562
	6	561	565
Green	0	Full Distribution	
	6	561	565
	5	564	568
	4	567	571
	3	570	574
	2	573	577
Amber	0	Full Distribution	
	1	581.5	585.0
	2	584.0	587.5
	3	586.0	590.0
	4	589.0	592.5
	5	591.5	593.5
	6	591.5	595.0
	7	594.0	597.5
Orange	0	Full Distribution	
	1	596.5	600.0
	2	599.0	602.5
	3	601.5	604.0
	4	603.8	608.2
	5	606.8	611.2
	6	609.8	614.2
	7	612.8	617.2
	8	615.8	620.2
Red	0	Full Distribution	
	2	611	618
	3	614	622
	4	616	634